



Features&Advantages

Cost Savings

Substantial savings from the use of replaceable grease pouches and battery packs (Service Pack)

Remote Installation

High output pressure (30kgf/cm²) enables remote installation up to 10m (33ft)

Multi-Point Installation

Up to 8 lube points using Ø6mm tube, max. 6m (20ft) per point

Simple Operation

Easy to program with built-in LCD and simple button controls

Convenient Maintenance

Transparent container for easy visual inspection of remaining lubricant

Other Features

- ▶ Various dispensing settings & grease pouch volumes to suit a wide range of industrial applications
- ▶ Auto Lock Out mode to prevent unintentional mode changes
- ▶ Easy to install in hazardous & confined areas




Typical Applications



- Automotives, irons/steel mills, and nuclear power plants
- Motors and pumps in city water & wastewater treatment facilities
- Cleanroom & LM Guide where precise, multi-point lubrication is needed
- Any places with extreme (low or high) temperature
- HVAC equipment & cooling towers where long lube lines may be necessary



Details

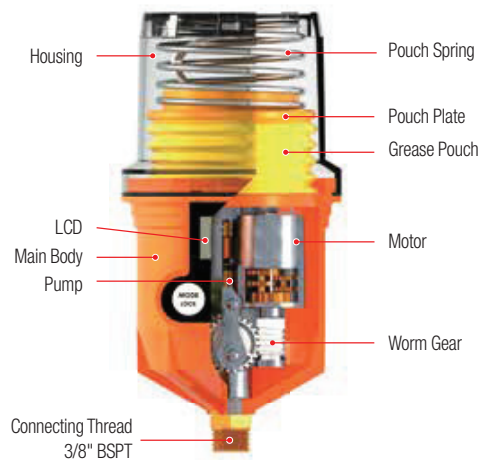

Specifications

Grease Pouch Capacity

60ml/125ml/250ml/500ml (replaceable)

Operating Pressure

Avg. 30kgf/cm² (425psi)
Max. 60kgf/cm² (850psi)

Operating Temperature

Standard Alkaline Battery: -15°C~60°C (5°F~140°F)
Optional Lithium Battery: -40°C~60°C (-40°F~140°F)

Dispensing Periods

60ml: 1, 2, 3, ... 10, 11, 12 month
125ml/250ml: 1, 2, 3, 6, 12 month & H (15 days)
500ml: 1, 2, 4, 6, 12, 18, 24 month & H (15 days)

Multi-Point Installation

Max. 6m (20ft) with Ø6mm tube
(up to 8 lube points)

Remote Installation

Max. 10m (33ft) with Ø6mm tube

Power Supply

DC 4.5V Battery Pack (replaceable)
Standard: Alkaline Battery
Optional: Lithium Battery

Dispensing Volume

0.34ml/stroke (@20°C/68°F)

Product Certifications & IP Code

UL/CE/IP54

Rev.02